









# 卧式螺带混合机

## LHY HORIZONTAL RIBBON MIXER



粉体混合 颗粒混合 加液混合 冷却/加热 打散  
powder mixing, granule mixing, mixing with spray, cooling/heating, scattering

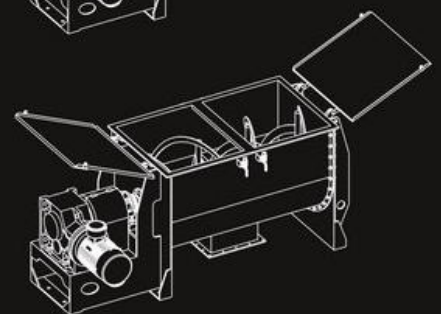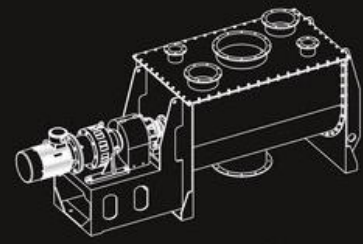

TEL: 86-021-69176576 69176577

上海市嘉定区南翔高科技园区 ( 胜辛南路399号 )

Number .399, South Shengxin Road, Nanxiang High-tech Garden,  
Jiading District, Shanghai City, China

**升立机械**

粉体技术实业专家



#### Options and accessory:

- Material
- Single direction inner and outer ribbon
- Special separated / fault ribbon
- Continuous feeding and discharge
- Types of feeding inlet
- Discharge valve types
- Heating/cooling jacket
- Sealing structure
- Spraying device
- Chopper
- Cleaning device
- Sampling device
- Drive unit

#### 特征项目与附加装置


- 设备材质
- 单向内外螺旋带形式
- 特殊断层螺旋带形式
- 连续进出料形式
- 进料口开设形式
- 出料阀配备形式
- 加热、冷却夹套
- 匹配原料的密封结构
- 加液装置
- 温度工艺
- 飞刀装置
- 净化装置
- 取样装置
- 驱动控制

#### 工作原理:

外螺旋带盘绕形式配合旋转方向把物料从两端向中间推动，而内螺旋带把物料从中间向两端推动，形成对流混合。物料在相对短的时间混合均匀。设备应用于干粉，颗粒，液体与低粘度的浆料。

#### Working principle:

The vortex outer ribbon combined with rotation direction drive material from two ends to center; At the same time, inner ribbon drive material from center to two ends. Materials are evenly mixed at shortest time. Ribbon mixers are widely used for mixing dry powder, granule, liquid and paste with low viscosity.

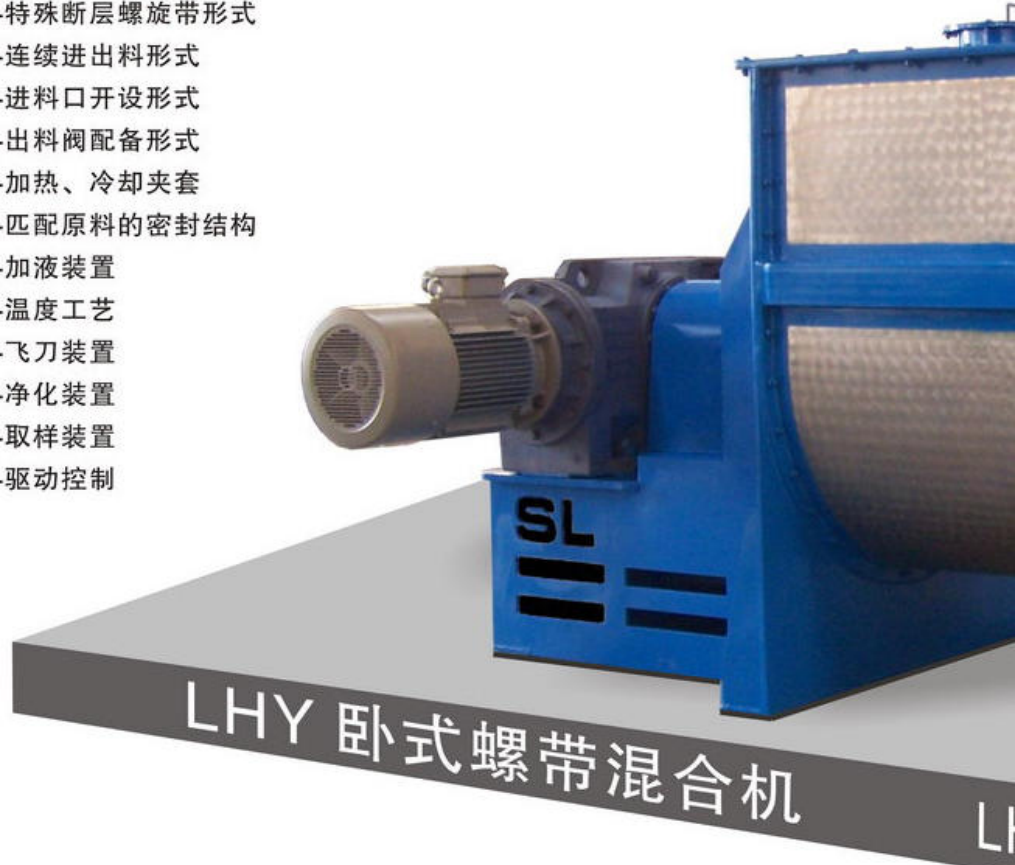

规格型号 specification	LHY-0.3	LHY-0.5	LHY-1	LHY-2	LHY-3	LHY-4	LHY-5	LHY-6	LHY-8	LHY-10	LHY-15	LHY-20	LHY-30
有效容积 (M³) working capacity	0.18	0.3	0.6	1.2	1.8	2.4	3	3.6	4.8	6	9	12	18
批次最大产量KG working capacity	200	300	600	1200	1800	2500	3000	3600	4800	6000	9000	12000	15000
转速 (r/min) speed(rpm)	41	41	33	33	33	27	27	27	22	22	14	14	12
驱动功率KW power(KW)	4	5.5	11	15	18.5	22	30	37	45	45	55	75	110
设备重量(kg) weight(kg)	550	900	1600	2700	3600	4200	5100	5600	6500	7800	11000	13000	16000
L	2280	2670	3140	3860	4460	4950	5280	5530	5100	5610	5820	6060	6200
W	680	780	980	1200	1300	1400	1550	1560	1720	1750	2000	2350	2500
H	880	1240	1400	1650	1700	2000	2100	2200	2500	2650	2900	3160	3350

以上为标准型设备参数，非标准型设备参数参照设备图纸。

The above is the parameter for standard equipment, Non-standard equipment please refer to the drawing.




### 结构特征:

螺带混合机是高效、应用广泛的单轴混合机，半开管状筒体内的主轴上盘绕蜗旋形式且成一定比例的双层螺带。盘旋的螺旋带依附主轴运转，能推使物料随螺旋带蜗旋方向行径。混合机卧式筒体底部中央开设出料口，外层螺旋带的蜗旋结构配合主轴旋转方向驱赶筒壁内侧物料至中央出料口出料，确保筒体内物料出料无死角。

### Discription:

Batch type ribbon mixers are of wide application and high efficiency. Horizontal, single shaft with double, proportioned ribbon is housed in the tubular mixing drum. The vortex ribbon rotates with main shaft and thus bring material move towards direction of vortex ribbon. We can design round or rectangular shape inlet port on top cover, discharge valve (manual, pneumatic or electric driven) in middle of bottom. The vortex structure of outer ribbon combined with rotation of main shaft drive material to discharge outlet guaranteeing no dead corner.

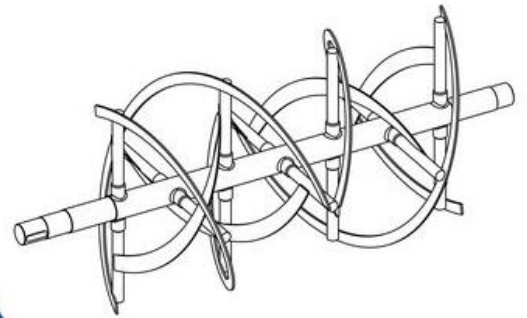

混合时间3-8分钟  
 Batch mixing time: 3-8 minute  
 温和且均匀的混合物料  
 Even and gentle mixing  
 无残留迅速出料  
 No leftover and quick discharge  
 可配置重型结构  
 Heavy-duty structure (option)

HORIZONTAL RIBBON MIXER

